


SHAKER and MIXER



WARRANTY
2
YEARS

ARGO LAB

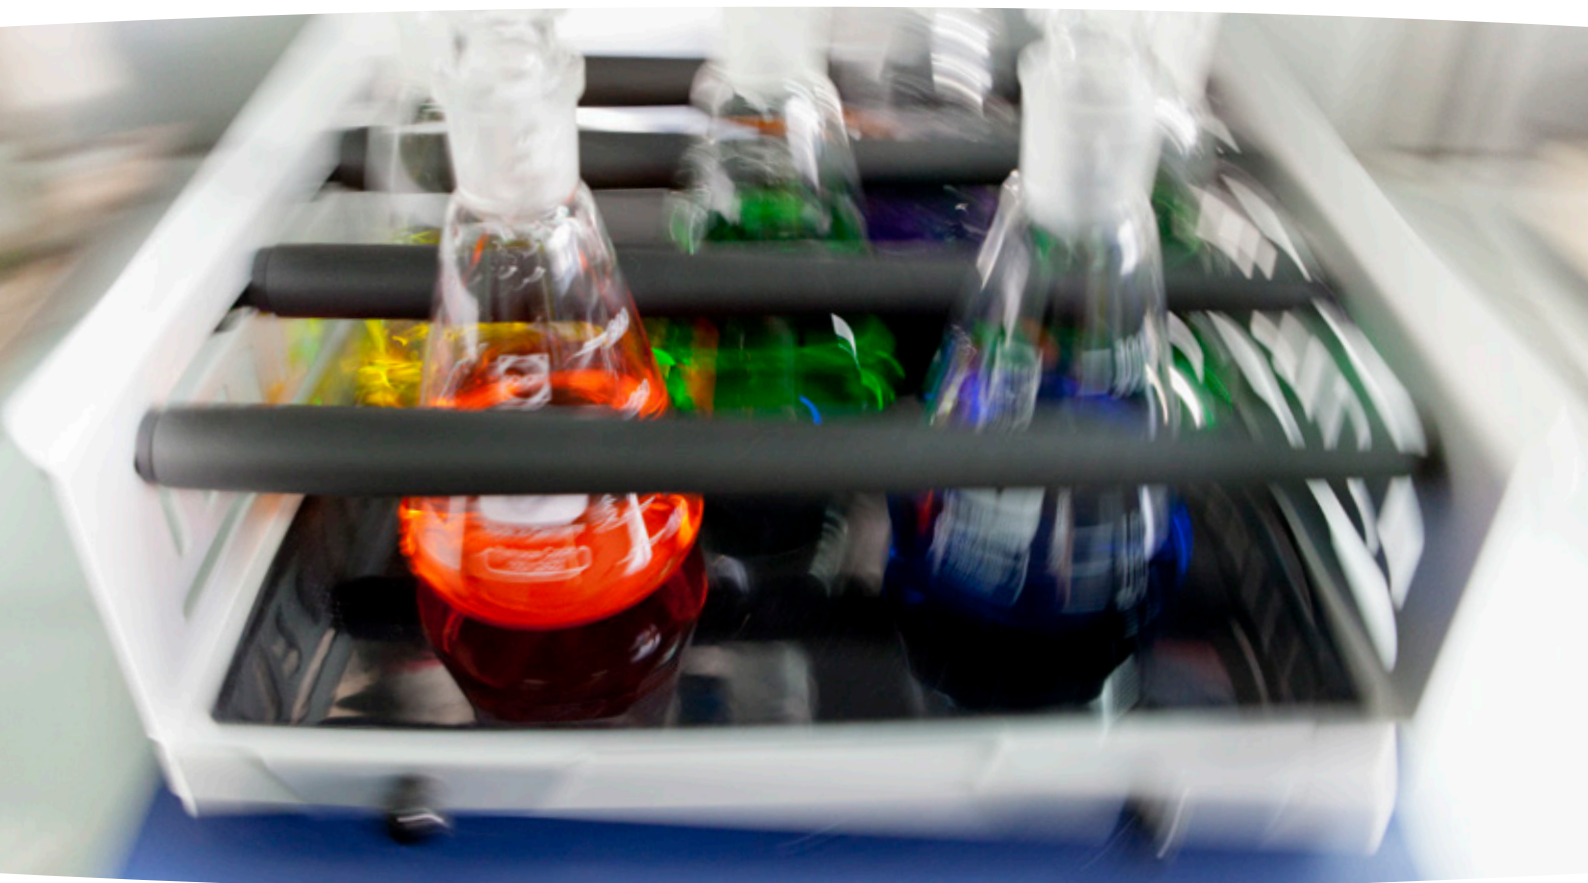

SKO D-XL

SHAKER

Cod. 22006033

Cod. 22006013

Cod. 22006023

LINEAR
ORBITAL
3D



FEATURES


- Maximum load : **linear orbital 7.5 kg- 3D 5 kg**
- **LCD display** with speed and time adjustment
- **Speed and timer** can be displayed at the same time
- Wide availability of **accessories**
- **Electronic** speed and time **adjustment**
- **Timer** can be set from 1 minute to 20 hours or continuous
- Maintenance-free **motor**
- **Protection** from exceeding maximum speed level
- **RS232** interface

All models are supplied without a stand.



LINEAR

Speed range: **100 ... 350 rpm**




P/N. 22006033

MOVEMENT ON ONE AXIS

ORBITAL

Speed range: **100 ... 500 rpm**





P/N. 22006013

MOVEMENT ON AXIS X AND Y

3D

Speed range: **10 ... 70 rpm**



P/N. 22006023

MOVEMENT ON AXIS X, Y AND Z

ACCESSORI




SUPPORTS



Support with **NON-SLIP FILM**
p/n: **22006223**



Drilled support for **CLIPS**
p/n: **22006243**



Universal stand with **4 ADJUSTABLE ROLLERS**
p/n: **22006233**



Additional roller
p/n: **22006553**

FLASK CLIP FOR PERFORATED HOLDER



Flask clips **25 ml**
Max 28 clips
p/n **22006453**



Flask clips **50 ml**
Max 28 clips
p/n **22006463**



Flask clips **100 ml**
Max 16 clips
p/n **22006473**



Flask clips **200/250 ml**
Max 9 clips
p/n **22006483**



Flask clips **500 ml**
Max 9 clips
p/n **22006493**

- Suitable for "touch" and continuous operations
- Wide speed range, 0 to 2500 rpm with continuous adjustment
- Rugged construction body
- Silicone feet and steel base for high stability
- Eccentric motor with oil-free gears



ACCESSORIES AND TUBE HOLDER



TOP PLATE
22008103



TOP CUP
22008143



8 x 16 mm
22008133



15 x 10 mm
22008153



16 x 12 mm
22008123



48 x 6 mm
22008113



PAD
22008163

Data sheet	SKO-D XL ORBITAL	SKO-D XL LINEAR	SKO-D XL 3D	MIX
Power supply	220V - 50/60Hz	220V - 50/60Hz	220V - 50/60Hz	220V - 50/60Hz
Power consumption	30W	30W	40W	60W
Movement agitation	10 mm - ORBITAL	10 mm - LINEAR		4 mm - ORBITAL
Angle of inclination	-	-	9°	-
Max shaking weight	7,5 kg	7,5 kg	5 kg	-
Plate size without supports	320 x 320 mm	320 x 320 mm	320 x 320 mm	-
Motor	Brushless	Brushless	Brushless	Eccentric
Stirring speed	100... 500 rpm	100...350 rpm	10...70 rpm	0... 2.500 rpm
Speed indicator	LCD Display	LCD Display	LCD Display	Analog, continuous
Timer	Yes	Yes	Yes	-
Timer indicator	Display LCD	Display LCD	Display LCD	-
Time set	1 min ... 20 h - continuous	1 min ... 20 h - continuous	1 min ... 20 h - continuous	-
Dimensions (W x H x D)	420 x 370 x 100 mm	420 x 370 x 100 mm	430 x 360 x 106 mm	127 x 160 x 130 mm
Weight	13,5 kg	13,5 kg	9 kg	3,5 kg
Operating temperature	5...40 °C	5...40 °C	5...40 °C	5...40 °C
Operating humidity max.	80%	80%	80%	80%
IP protection	IP21(sec. DIN EN60529)	IP21(sec. DIN EN60529)	IP21(sec. DIN EN60529)	IP21(sec. DIN EN60529)
RS232 interface	Yes	Yes	Yes	No
p/n	22006013	22006033	22006023	22008013

DISTRIBUTED BY



ISO 9001 Certified manufacturer

GARANZIA
2
ANNI



GUARANTEED

GIORGIO BORMAC s.r.l.

